

# Binks

## The All Purpose Mid-Sized Spray Gun

Binks  
Advance HD

Significantly raising the benchmark in spray gun performance and productivity



# Binks spray guns have evolved with our Advance HD range, engineered for all industrial spray finishing applications.

Advance HD unrivaled high performance is achieved with new design technology utilizing high capacity air passages with a separate “balanced” air valve to provide an unrestricted flow of compressed air through the gun body. This “free breathing” air movement enables the precision-engineered air caps and fluid tips to produce superior atomization with consistent even distribution throughout the spray pattern.



## Features:




**Advance HD (high demand) spray guns are available in Pressure, Suction and Gravity feed formats**

- Robust, lightweight and work friendly design for High Demand outputs
- Contoured handle design greatly reduces RSi and operator fatigue
- Balanced air valve design for lighter trigger pull and improved air flow
- Stainless steel tips, needles and fluid passageways as standard
- CE marked and fully ATEX approved
- Wide range of air caps provide a superior finish with the best possible paint savings and transfer efficiency (compliant or conventional, depending on spray gun range selected)




**Perfectly balanced, naturally comfortable**

- The Advance HD is lightweight with a lighter trigger action, increased finger room, and contoured handle design. Advance HD spray guns are precision built by DeVilbiss using the best materials and component parts for a guaranteed, reliable, long and durable working life.

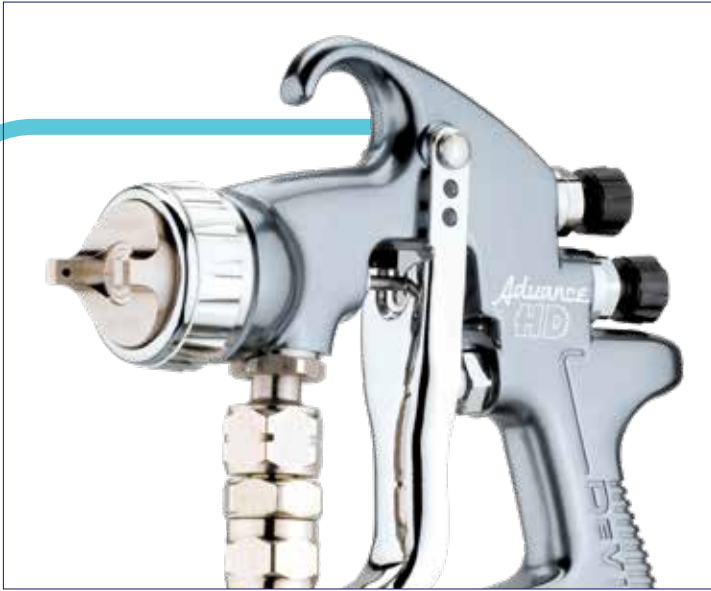

### Aluminum Alloy Body

- Heavily anodized for durability
- Wide hook opening 1/2" (12mm)
- Easy adjustments for precise control
- Separate "balanced" air valve design

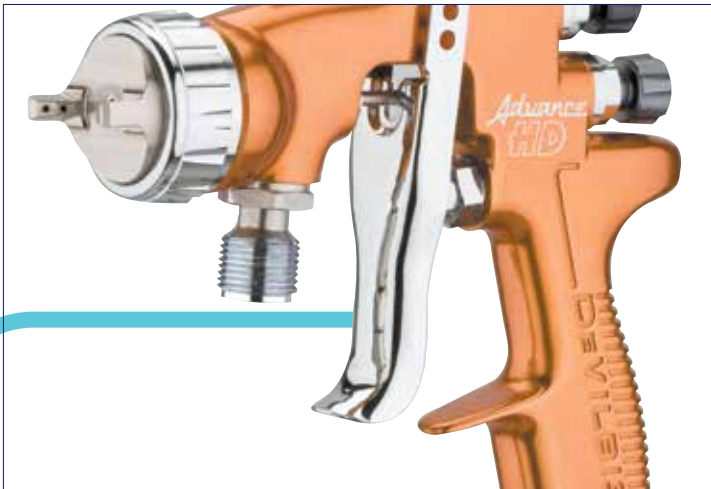

### Increased Finger Space

- Easier access for operator
- Lighter trigger pull tension
- Reduced trigger travel
- Self-adjusting needle packing assembly (PTFE)




### Curved Handle

- Superior fit and feel with reduced operator fatigue and RSI
- Air inlet adjuster "cheater" valve
- 1/4" Universal Thread air inlet

# Compliant Spray Gun Range

Advance HD Compliant Spray Guns utilize high-grade Stainless Steel fluid tips and needles, matched with either Trans-Tech Compliant or HVLP air caps manufactured from Plated Hard Brass for a long and durable working life. Select your Advance HD Compliant Spray Gun preference and nozzle combinations from the charts (below) to achieve optimal performance for your spray process.

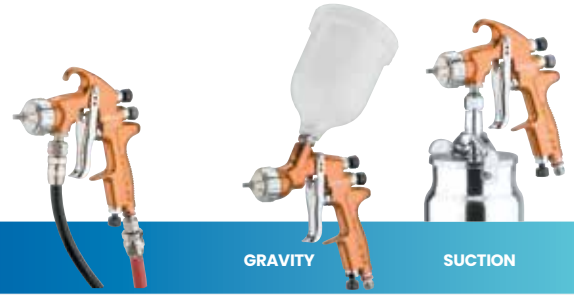

AIR CAP NUMBER AND TYPE	AIR CONSUMPTION BAR (psi) RECOMMENDED	AIR INLET PRESSURE	TYPICAL FLUID SIZE mm*	TYPICAL FAN PATTERN*	PRESSURE	GRAVITY	SUCTION
No. 500R (HVLP)	195 l/min (7 scfm)	1.0 bar (14 psi)	130-190	Round spray	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm	1.6mm, 1.8*mm, 2.0mm, 2.2mm
No. 505 (HVLP)	385 l/min (13.6 scfm)	1.3 bar (19 psi)	130-190	270	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm	1.6mm, 1.8*mm, 2.0mm, 2.2mm
No. 590HV (HVLP)	200 l/min (7.1 scfm)	1.0 bar (14 psi)	0-150	120	0.5mm, 0.7mm, 1.0mm		
No. 510 Trans-Tech	283 l/min (10 scfm)	2 bar (29 psi)	160-220	270	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm	1.6mm, 1.8*mm, 2.0mm, 2.2mm
No. 513 Trans-Tech	394 l/min (14.1 scfm)	2 bar (29 psi)	200-800	350	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm	1.6mm, 1.8*mm, 2.0mm, 2.2mm
No. 515 Trans-Tech	364 l/min (12.9 scfm)	2 bar (29 psi)	200-400	320	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, 2.8*mm		
No. 520 Trans-Tech	284 l/min (10 scfm)	2 bar (29 psi)	150-250	280	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm		
No. 522 Trans-Tech	410 l/min (14.5 scfm)	2 bar (29 psi)	200-600	350	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, 2.8*mm		
No. 523 Trans-Tech	410 l/min (14.5 scfm)	2 bar (29 psi)	200-400	300	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, 2.8*mm		
No. 590 Trans-Tech	218 l/min (7.8 scfm)	2 bar (29 psi)	0-150	150	0.5mm, 0.7mm, 1.0mm		
No. 591 Trans-Tech	218 l/min (7.8 scfm)	2 bar (29 psi)	0-150	150	0.5mm, 0.7mm, 1.0mm		

No. 505 (HVLP) and No. 500R (HVLP) air caps operate at 0.7 bar (10 psi) at the cap.  
All illustrated flow rates and fan sizes may vary according to paint/material viscosity and pressure used.

# Conventional Spray Gun Range

Advance HD Conventional Spray Guns utilize high-grade Stainless Steel fluid tips and needles, matched with Conventional air caps manufactured from Plated Hard Brass for a long and durable working life. Select your Advance HD Conventional Spray Gun preference and nozzle combinations from the charts (below) to achieve optimal performance for your spray process.



AIR CAP NUMBER AND TYPE	AIR CONSUMPTION BAR (psi) RECOMMENDED	AIR INLET PRESSURE	TYPICAL FLUID SIZE mm*	TYPICAL FAN PATTERN*	PRESSURE	GRAVITY	SUCTION
No. 430 Conventional	339 l/min (12 scfm)	3.5 bar (50 psi)	200-280	200	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm
No. 443 Conventional	345 l/min (12.6 scfm)	3 bar (45 psi)	200-300	300	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm	1.2mm, 1.3mm, 1.8*mm, 2.0mm, 2.2*mm	1.6mm, 1.8*mm, 2.0mm, 2.2mm
No. 462 Conventional	380 l/min (13.5 scfm)	3 bar (45 psi)	500-3000†	450†	2.2*mm†, 2.8*mm†		
No. 470 Conventional	465 l/min (16.4 scfm)	3 bar (45 psi)	500-1800†	420†	2.2*mm†, 2.8*mm†	2.8*mm	
No. 477 Conventional	480 l/min (17 scfm)	3 bar (45 psi)	200-800	430	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm		
No. 497 Conventional	510 l/min (18 scfm)	3.5 bar (50 psi)	200-600	380	0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm		

## Part numbering and packaging

Advance HD spray gun kits are packaged as: Pressure gun only; Suction gun with 1 liter cup; and Gravity Feed kits including .568 ml standard gravity cup.

\* Hardened & tungsten carbide tips and needles are available in these sizes.  
† = ceramic material

## Example of Advance HD Spray Gun part numbering:

ADV-P430 means ...  
ADV = Advance Gun / P = Pressure / 430 = Conventional Air Cap / 14 = 1.4mm Fluid Tip and Needle

### Spray gun inlet thread sizes and type:

Air Connection 1/4" (m) Universal Thread size, accepts BSP and/or NPS connectors.  
Fluid Connection 3/8" (m) Universal Thread size, accepts BSP and/or NPS connectors.



# Optional Accessories



## Gravity Cup

GFC-501

Gravity Feed Cups are a convenient and portable way to provide a minimal amount of material to the spray gun. Gravity feed cups help reduce wasted material and the cups are designed to be easy to clean.



## Gravity Cup (Blue polyester)



GFC-511 - For difficult fluids.



## Suction Cup

KR-556-1-B

Suction Feed Cups hold more material and spray at any angle, ideal for bigger jobs. Slightly harder to clean than gravity cups.

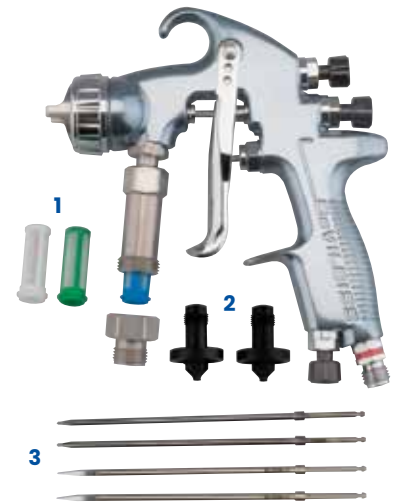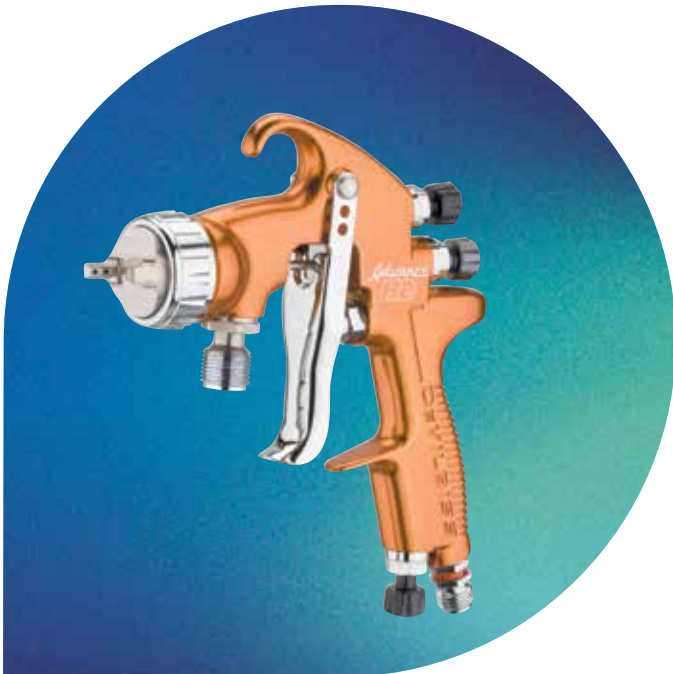

## Fluid Filter Kit

1. VSA-512 St/St Fluid Filter Kit (includes 3 elements)
2. Tungsten Carbide and Hardened Tips/Needles (abrasive materials)
3. Nylon Tipped Needle



## Experience the difference.

Binks is a leading global manufacturer of products and systems for the supply, application and curing of sprayed and dispensed materials. Binks serves a variety of industries, including automotive, pharmaceuticals, food and beverage, and manufacturing. With decades of experience, Binks continues to set the standard for precision, reliability, and innovation in fluid technology solutions.



For more information,  
visit [binks.com](https://binks.com).



### A powerful solution can start with a simple conversation

We want to help build the best solution to your application challenges. Learn more about what we can offer by reaching out to the office nearest you.

#### Americas

#### EMEA

#### China

#### Japan Sales Office

#### Japan Binks/DeV

#### India/SE Asia

1.800.992.4657  
44.0.120 257.1111  
86.21.33730108  
81.45.785.6421  
81.45.785.6421  
44.0.120 257.1111

[marketing@binks.com](mailto:marketing@binks.com)  
[marketing-eu@binks.com](mailto:marketing-eu@binks.com)  
[mkt\\_cn@binks.com](mailto:mkt_cn@binks.com)  
[jp-rans-tokyosales@binks.com](mailto:jp-rans-tokyosales@binks.com)  
[jp-binks-devi@binks.com](mailto:jp-binks-devi@binks.com)  
[marketing-roa@binks.com](mailto:marketing-roa@binks.com)

©2025 Binks.

Models and specifications subject to  
change without notice. All rights reserved.  
Form No. 03-516-01