







# **PRESSURE TANKS & CUPS**

With today's tough coatings, you need durable, easy-to-clean containers to stay productive. Graco's complete line of pressure tanks and pressure cups can handle everything from conventional coatings to corrosives.

- **Stainless steel pressure tanks with non-corrosive wetted parts – from 2.0 gallons to 15 gallons (7.6 to 56.8 liters).**
- **1 & 2 quart (.95 to 1.89 liters) pressure cups.**

# Stainless Steel Pressure Tank Models

Capacity	Height In. (cm)	Weight Lbs. (kg)	Models with Agitators		Models without Agitators	
			Low Pressure (HVLP) Regulated to 15 psi (1.05 bar) (0.105 MPa)	High Pressure Regulated to 100 psi (7 bar) (0.7 MPa)	Low Pressure (HVLP) Regulated to 15 psi (1.05 bar) (0.105 MPa)	High Pressure Regulated to 100 psi (7 bar) (0.7 MPa)
• Two Gallon	26.0 (66.0)	38 (17)	236-156	236-158	–	–
	25.4 (64.5)	30 (14)	–	–	236-155	236-157
• Five Gallon	30.5 (77.5)	74 (34)	236-146	236-152	–	–
	30.5 (77.5)	65 (30)	–	–	236-143	236-149
• Ten Gallon	33.9 (88.0)	85 (39)	236-147	236-153	–	–
	33.9 (88.0)	76 (35)	–	–	236-144	236-150
• Fifteen Gallon	44.6 (113.2)	101 (46)	236-148	236-154	–	–
	44.6 (113.2)	92 (42)	–	–	236-145	236-151

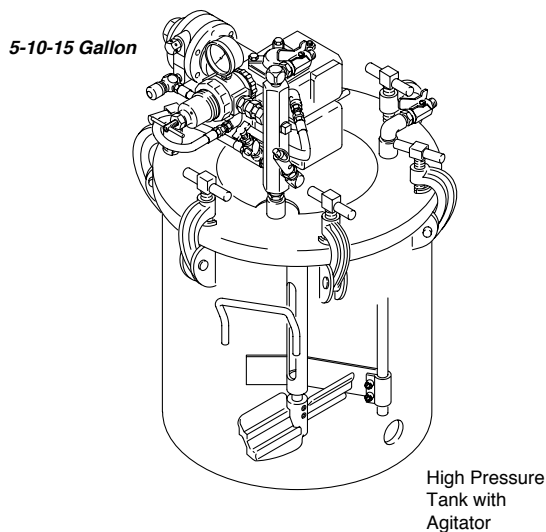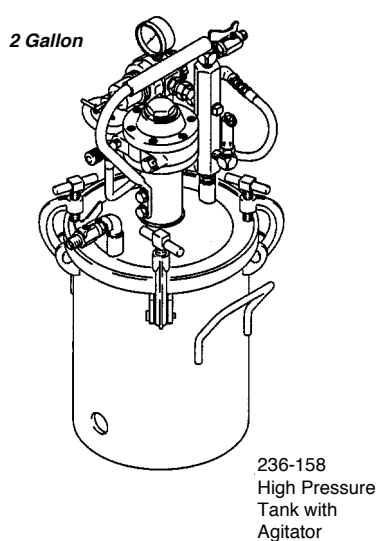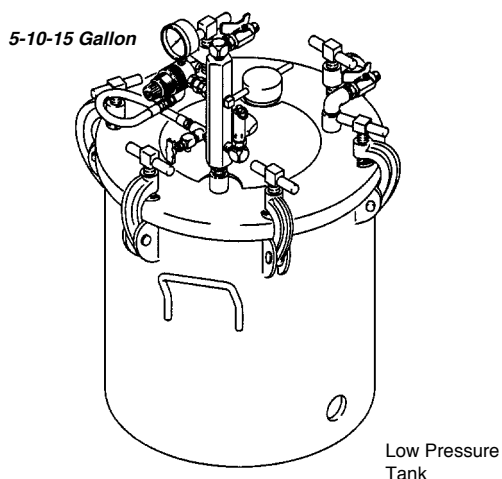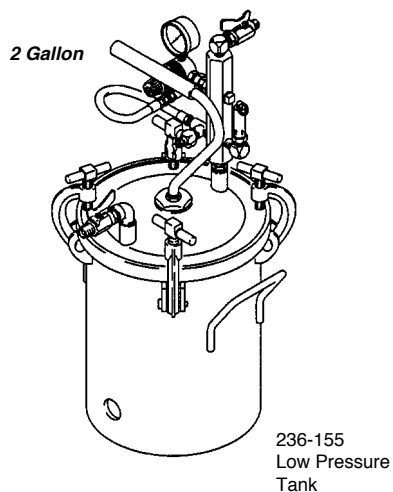

**New optional Gun Air Regulator Kit (235-042) can be added to all the tanks above.  
All Pressure Tanks with agitators feature heavy duty back-gear models.**

• **Waterborne compatible**

# Stainless Steel Pressure Tanks


Made of electropolished, 304/316 stainless steel. Use with corrosives, waterbased and acid-catalyzed materials.

## Specifications


Maximum Working Pressure .....	100 psi (7 bar) (0.7 MPa)
Relief Valve Setting .....	100 psi (7 bar) (0.7 MPa)
Regulated Pressure .....	see particular models by part number
Air Inlet .....	1/4 - 18 npt(m)
Agitator Air Consumption	
Continuous duty at 60 rpm .....	15 scfm / 0.42 m <sup>3</sup> /min. @ 80 psi (5.5 bar) (0.55 MPa)
Fluid Outlet .....	3/8 - 18 npsm(m)
Wetted Parts	
Without agitator .....	304, 316 electropolished stainless steel, Thiokol, Zytel, Mylar
With agitator .....	304, 316 electropolished stainless steel, Thiokol, Zytel, Teflon, Bronze
Instruction Manual	
2 Gallon .....	308-370
5, 10, 15 Gallon .....	308-369



**ASME  
Approved**



5-10-15 Gallon  
SST Pressure Pot  
Design



2 Gallon  
SST Pressure Pot  
Design

COMPONENTS

# Aluminum Non-ASME Pressure Tank


## Specifications

Order No. for 2-1/2 Gallon Pressure Pot .....	171-226
Order No. for Pressure Pot with Dual Regulators .....	223-833
Order No. for Pressure Pot with Dual Regulators, Hoses and Air Spray Gun .....	223-834
Tank Capacity .....	2.5 gal. (9.5 liter)
Maximum Working Pressure .....	50 psi (3.5 bar) (0.35 MPa)
Relief Valve Setting .....	50 psi (3.5 bar) (0.35 MPa)
Fluid Inlet .....	1/4 npt(m)
Fluid Outlet .....	3/8 npsm(m)
Wetted Parts .....	Aluminum, brass, steel, bronze
Air Inlet .....	1/4 npt(m)
Size .....	21 in. H x 11 1/4 in. W (53 cm H x 286 cm W)
Weight .....	11 lbs. (5 kg)
Instruction Manual .....	307-133


## Pressure Cups

For small jobs. Sturdy design. Easy to open, clean and close.  
Available in one or two quart (.95 or 1.89 liters) size.


Part No.	Qt. (Liters)	Inlet npsm(f)	Wetted Parts	Inst. Manual
• 239-802	1 (0.95)	3/8	304 SST	308-791
<b>Note:</b> Single regulator assembly.				
• 239-803	1 (0.95)	3/8	304 SST	308-791
<b>Note:</b> Double regulator assembly.				
• 239-804	1 (0.95)	3/8	304 SST	308-791
<b>Note:</b> Remote assembly with hoses.				
239-801	Pressure Cup Only			



239-802

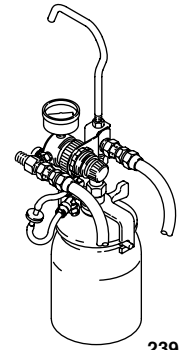

239-804



239-803

## Gravity Cups

Part No.	Capacity fl. oz. (cc)	Fittings npsm(f)	Wetted Parts	Instruction Manual
• 239-714	16 (473)	3/8 bottom entry	Nylon Cup SST Fitting	308-792
• 239-715	8 (236)	3/8 bottom entry	Nylon Cup SST Fitting	308-792

## Siphon Cups

Part No.	Capacity fl. oz. (cc)	Fittings npsm(f)	Wetted Parts	Instruction Manual
• 239-582	32 (946)	3/8	SST	308-792
• 239-584	16 (236)	3/8	SST	308-792

- **Waterborne compatible**