

Product Specifications

Connection Flange


Model	A	B	C	D	Pump	KW	Fans	KW	Extract volume	Fan	Holes	P.C.D.
GWB 150	1500	1580	2.25	2.25	1	1.5	1	1.5	2.26m ³ /sec	630	12x10mm Dia.	625
GWB 225	2250	2330	2.25	2.25	1	2.2	1	2.2	3.57m ³ /sec	630	12x10mm Dia.	675
DFB 300	3000	3080	2.25	2.25	1	3.0	1	4.0	4.53m ³ /sec	710	12x10mm Dia.	755
DFB 375	3750	3830	2.25	2.25	1	4.0	1	4.0	5.90m ³ /sec	710	12x10mm Dia.	755
DFB 450	4500	4580	2.25	2.25	1	4.0	2	2.2	6.74m ³ /sec	630	12x10mm Dia.	675
DFB 525	5250	5330	2.25	2.25	1	5.5	2	4.0	8.27m ³ /sec	710	12x10mm Dia.	755
DFB 600	6000	6080	2.25	2.25	1	5.5	2	4.0	9.06m ³ /sec	710	12x10mm Dia.	755
DFB 675	6750	6830	2.25	2.25	2	4.0	2	4.0	10.64m ³ /sec	710	12x10mm Dia.	755



When a dry filter spray booth is not suitable because of the nature of the materials to be applied, or due to the requirement to improve the efficiency of the extraction system.

Our water wash spray booths provide the perfect solution, utilising the latest nozzle and weir technology to meet improved extraction criteria.

Dimensions

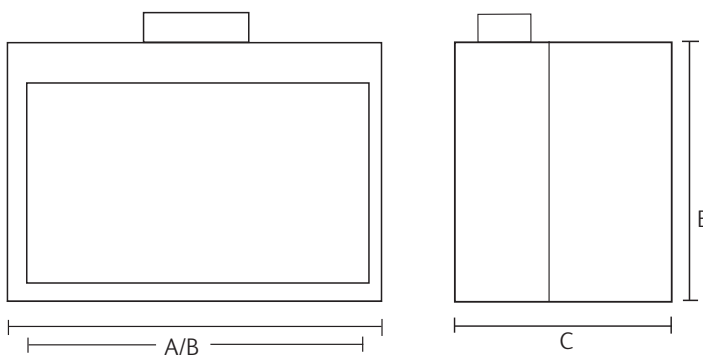

Features

- The belt driven axial fan can be fitted on top or at the rear, featuring external motors and integral hatches.
- Top or rear mounted fans.
- Option of flameproof motors.
- Choice of easy to fit low cost filters.
- Supplied with push button starter(s).
- Simple, low cost maintenance.
- Full on site install service available.
- Complies with current health and safety legislation

Benefits

- Low-cost means of providing a safe environment.
- Increased quality of finished work. Makes working conditions healthier and more pleasant for operatives.
- Eliminates extra cleaning, previously caused by overspray.

