


Product Specifications

Model	Dimensions				Fans	Extract volume	kW	Connection Flange		
	A	B	C	D				Fan	Holes	P.C.D.
CFB 150	1500	1580	2.25	2.25	1	1.35m ³ /sec	1.1	560	12x10mm	605
CFB 200	2000	2080	2.25	2.25	1	1.81m ³ /sec	1.5	560	12x10mm	605
CFB 225	2250	2330	2.25	2.25	1	2.03m ³ /sec	1.5	630	12x10mm	675
CFB 250	2500	2580	2.25	2.25	1	2.20m ³ /sec	2.2	630	12x10mm	675
CFB 275	2750	2830	2.25	2.25	1	2.47m ³ /sec	2.2	630	12x10mm	675
CFB 300	3000	3080	2.25	2.25	1	2.72m ³ /sec	3.0	710	12x10mm	725
CFB 350	3500	3580	2.25	2.25	1	3.15m ³ /sec	3.0	710	12x10mm	725
CFB 400	4000	4080	2.25	2.25	1	3.60m ³ /sec	4.0	710	12x10mm	725
CFB 450	4500	4580	2.25	2.25	1	4.04m ³ /sec	4.0	710	12x10mm	725
CFB 500	5000	5080	2.25	2.25	2	4.50m ³ /sec	3.0	630	12x10mm	675
CFB 600	6000	6080	2.25	2.25	2	5.40m ³ /sec	3.0	710	12x10mm	725
CFB 700	7000	7080	2.25	2.25	2	6.29m ³ /sec	3.0	710	12x10mm	725

This unique spray booth provides all the same features as the standard dry filter spray booth with the added benefit of a quiet working environment.

Dimensions

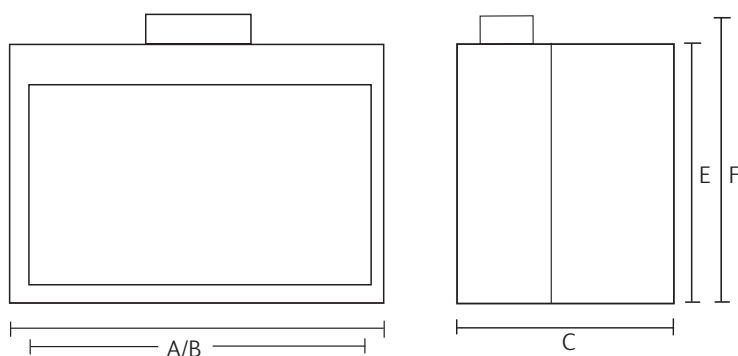

Features

- The belt driven axial fan can be fitted on top or at the rear, featuring external motors and integral hatches.
- Top or rear mounted fans.
- Option of flameproof motors.
- Choice of easy to fit low cost filters.
- Supplied with push button starter(s).
- Simple, low cost maintenance.
- Full on site install service available.
- Complies with current health and safety legislation

Benefits

- Low-cost means of providing a safe environment.
- Increased quality of finished work. Makes working conditions healthier and more pleasant for operatives.
- Eliminates extra cleaning, previously caused by overspray.



Hi-Tec Spray Limited, Heronden Road, Parkwood Industrial Estate,
Maidstone, Kent, ME15 9YR. T: 01622 356590
www.hitecspray.co.uk sales@hitecspray.co.uk