



Ultra[®] Max II Standard

The industry standard for Airless Spraying of Paints



www.graco.com

EVERYDAY RELIABILITY

- Trust in proven technology with the Advantage Drive System. Runs quiet and is guaranteed for life!
- Rely on the industry standard: the Graco Endurance[™] Pump.
- Count on the SmartControl[™] 3.0 Pressure Control to get your daily job done! It delivers a consistent spray fan without fluctuations while protecting your investment against bad power conditions.

Professional Airless Applications

ULTRA[®] MAX II 695 STANDARD - ULTRA[®] MAX II 795 STANDARD - ULTRA[®] MAX II 1095 STANDARD



Ultra® Max II Standard

Electric Paint Sprayers for Larger Residential and Commercial Projects

This is for **YOU** when you're looking for technology that gets the job done. Technology proven to do the trick, time and time again.

The Ultra® Max II family is Graco's most popular electric airless paint sprayer for professionals. With over 25 years experience of proven quality and unmatched on-the-job productivity, it has become the industry standard in electric paint sprayers. A standard you can trust to get the job done.

The **Standard Series** are suited for professionals that don't need extras, but are looking for everyday reliability to get the job done fast and easy.

Choose the Ultra® Max II ...


...if you're looking for the optimal unit for larger residential and commercial painting jobs for inside as well as outside!

Where the Ultra® Max II 695 is well equipped for large residential new construction and renovation, the Ultra® Max II 795 is a step up from that and delivers the performance and output you need for larger commercial sites as well. On top of that, the Ultra® Max II 1095 has the versatility and performance to handle thicker materials such as anti-corrosion coatings and fire-retardants.

... and go for the Standard Series for everyday reliability!

Have a look at the features that have turned our ULTRA® MAX II range into the industry standard.

Discover this standard, like so many other professionals have already. This is where you stand out.



Advantage Drive™

The drive is the critical link between the engine and the pump.

Graco doesn't leave the manufacturing of our Advantage Drive System to others; we design and manufacture them at our world-class manufacturing facility in the United States.

- Hardened steel gears run extremely quietly
- The most durable, longest lasting drive in the industry
- Lifetime warranty

SMARTCONTROL™

SmartControl™ 3.0 with Pressure Gauge

Graco's advanced SmartControl 3.0 offers precision pressure control that delivers a consistent spray fan without pressure fluctuations.

- Spray thicker coatings and run longer hoses
- ProGuard™ Sprayer Protection System guards against bad or extreme job site power conditions



Endurance™ Pump

Graco's proven and reliable piston pump technology with LongLife-V packings.

QuickAccess™ intake valve to easily clean or clear debris. Spring loaded for better pump efficiency.



Materials & Applications

The ULTRA® MAX II STANDARD is the ideal unit for medium to large painting jobs, inside as well as outside! Your most reliable buddy for renovations, new construction, commercial and residential buildings, exterior facades, new housing projects, etc.

It handles most common tip sizes with ease!

The ULTRA® MAX II STANDARD sprays perfectly acrylics, primers, emulsions, waterborne as well as solvent paints.



Watch our application videos at:
<http://3.graco.eu.com>






All units equipped with 15 METER hose



GOOD TO KNOW

Flow Chart (lpm)

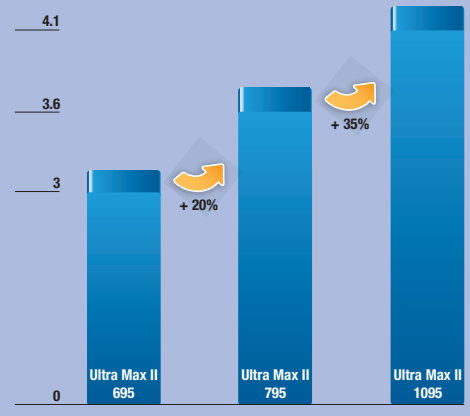

Ultra Max II 695 ProContractor
for large residential construction & renovation

Ultra Max II 795 ProContractor
for large residential & commercial

Ultra Max II 1095 ProContractor
for large commercial & light plaster

TiltBack™ Cart Design

Sprayer kick stand allows convenient, one person bucket change and facilitates cleaning and maintenance of your pump.

JetRoller™

The new JetRoller system minimizes application time when combining rolling and spraying into one operation. The Inline™ valve provides even paint flow and eliminates dipping the roller in paint. Uses commonly available 18 or 25 cm roller covers.

Benefits:

- Reduces overspray
- Eliminates reaching
- Eliminates climbing and continually reaching up and down
- Complete large jobs in half the time of traditional methods

Kit includes a lightweight detachable roller frame, 50 cm extension, CleanShot™ Shut-Off™ valve, spray tip and guard.

www.graco.com

Easy Out™ Pump Filter

The Easy Out pump filter is designed to filter from the inside out so filters won't get stuck or collapse when filled with dirt or debris.

- ▶ Large 19.5 square inch filtering area reduces tip clogs and ensures a quality finish
- ▶ Vertical filter removes with the cap for less mess





Ultra[®] Max II Standard Accessories

Get the most out of your equipment, using our professional accessories

Improve your finishing quality



Guns

- 288475 Contractor™ gun, 2-finger, RAC X guard & 517 tip, 60 + 100 mesh filter
- 288009 Contractor gun, 4-finger, RAC X guard & 517 tip, 60 mesh filter
- 262114 Contractor gun, 2-finger, RAC X guard, no tip, 60 mesh filter



Easy Out™ Gun Filters

- 287032 Easy Out gun filter, 60 mesh x 1
- 287033 Easy Out gun filter, 100 mesh x 1
- 287034 Kit: 60 mesh x 1 + 100 mesh x 1



Easy Out™ Pump Filters

- 244071 30 mesh, grey
- 244067 60 mesh, black (= standard)
- 244068 100 mesh, blue
- 244069 200 mesh, red



BlueMax™ II Hoses

- 240794 1/4" x 15 m | 241272 1/4" x 20 m
- 223771 1/4" x 30 m | 240797 3/8" x 15 m
- 241275 3/8" x 30 m



Hose Connectors

- 156971 1/4" x 1/4" | 157350 1/4" x 3/8"



Whips (230 bar)

- 238358 3/16" x 0.9 m
- 238959 3/16" x 1.4 m
- 238359 3/16" x 1.8 m



Standard Endurance Pump Lower

- 248204 Ultra Max II 695
- 248204 Ultra Max II 795
- 248205 Ultra Max II 1095



Ultra[®] Max II Kit

- 288491 Contractor gun, 1/4" x 15 m hose, 1/4" x 0.9 m whip hose, RAC X guard & 621 tip
- 288501 Contractor gun, 3/16" x 7.5 m hose. RAC X FFA 210 reversible tip and guard. 25 cm tip extension. 2 x 100 mesh gun filter. Solvent seal kit and a cleaning brush.



JetRoller™ System 0.5 m Heavy Duty Extension

- | with Inline Gun | | without Inline Gun | |
|-----------------|--------------------------|--------------------|--------------|
| 24V490 | roller 18 cm | 24V492 | roller 18 cm |
| 24V491 | roller 25 cm | 24V493 | roller 25 cm |
| 232123 | 1 m Heavy Duty extension | | |



RAC X Tip Extensions

- | | | | |
|--------|-------|--------|-------|
| 287019 | 25 cm | 287020 | 40 cm |
| 287021 | 50 cm | 287022 | 75 cm |



CleanShot™ RAC X Pole Gun

- | | | | |
|--------|-------|--------|--------|
| 287026 | 90 cm | 287027 | 180 cm |
|--------|-------|--------|--------|



Rollers Exterior (complete)

- 6880095 30 cm fixed
- 098084 90-180 cm telescopic
- 098085 45-90 cm telescopic

Tips & Guards

- FFAXXX Green RAC X fine finish tip
- PAAXXX Blue RAC X professional airless tip
- WA12XX RAC X WideRac, for big surfaces
- 246215 RAC X guard



Liquids

- 206994 TSL™ 0.25 l
- 253574 Pump Armor™ 1 l

Ultra[®] Max II Standard

READY TO SPRAY,

Unpack, plug & spray!

Ready to go, the Ultra[®] Max II Standard ships complete and ready to spray! Contractor™ gun with HandTite™ RAC X™ guard and tips PAA517 + PAA621, 238358 BlueMax™ II whip hose 3/16" x 0.90m, 240794 BlueMax™ II hose 1/4" x 15m, 206994 TSL™ 0.25 l.

Find this unit at:

Specifications



	ULTRA [®] MAX II 695 Standard	ULTRA [®] MAX II 795 Standard	ULTRA [®] MAX II 1095 Standard
Part Numbers:	for Euro version - 220 V 16X656	16X873	16X875
	for Multi Cord version 16X657	16X871	–
	for UK - 110 V 16X658	16X872	–
Max. Tip Size:	1 gun 0.031"	0.033"	0.035"
	2 guns 0.019"	0.021"	0.025"
Flow - l/min. (gpm)	3.0 (0.75)	3.6 (0.95)	4.1 (1.15)
Max. Pressure - bar (PSI)	230 (3300)	230 (3300)	230 (3300)
Weight - kg (lbs)	43 (94)	45 (98)	55 (120)
SmartControl version - LED display	3.0	3.0	3.0
Motor Type	DC Brushless	DC Brushless	DC Brushless
Motor Rating - kW	1.75	2.0	2.2
Generator Requirements - kW	5	5	5